



- Flat wire coil for low copper losses

- 

- 

- High current c

- AE

- 

- 

r t curre t spi es




°C

- 


Noise suppr for motor

wipers / power seats/

- ers

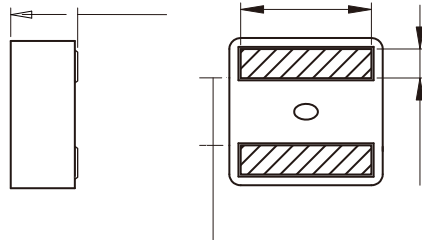

	( $\mu$ H)	$\pm 20\%$	(A)	(A)		(m )	(mm)
MDTA7070-1R0M	1.00	$\pm 20\%$	34.8	20.0	25.0	2.81	6.7 $\pm$ 0.3
MDTA7070-1R8M	1.80	$\pm 20\%$	25.0	15.8	21.0	4.46	6.7 $\pm$ 0.3
MDTA7070-3R3M	3.30	$\pm 20\%$	19.4	11.5	15.1	9.42	6.7 $\pm$ 0.3
MDTA7070-4R7M	4.70	$\pm 20\%$	15.5	10.5	13.6	13.5	6.7 $\pm$ 0.3
MDTA7070-6R8M	6.80	$\pm 20\%$	12.8	7.0	9.5	19.6	6.5 $\pm$ 0.3

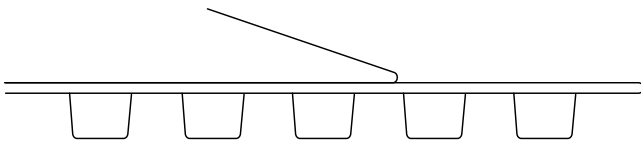

:

