


## MDE Series






### FEATURES

- High saturation current realized by material properties and structure design.
- Low DC resistance to achieve high conversion efficiency and lower temperature rising.
- Low Profile.
- Magnetically shielded structure to accomplish high resolution in EMC protection.
- Halogen free, Lead Free, RoHS Compliance.
- Operating temperature: -40 to +125 °C
- Quantity: 3000PCS




### APPLICATION

- Generic in portable DC to DC converter line.
- Smart phone, PAD
- DC/DC converter
- Thin-type power supply module.



| MDE252012-R47M | 0.47 | ±20% | 21  | 25  | 5.3 | 4.95 | 4.60 | 4.18 |
|----------------|------|------|-----|-----|-----|------|------|------|
| MDE252012-R68M | 0.68 | ±20% | 29  | 35  | 5.0 | 4.63 | 3.70 | 3.36 |
| MDE252012-1R0M | 1.00 | ±20% | 41  | 49  | 4.4 | 4.04 | 3.50 | 3.18 |
| MDE252012-1R5M | 1.50 | ±20% | 64  | 77  | 3.2 | 2.91 | 2.50 | 2.27 |
| MDE252012-2R2M | 2.20 | ±20% | 85  | 98  | 3.0 | 2.73 | 2.27 | 2.06 |
| MDE252012-4R7M | 4.70 | ±20% | 196 | 235 | 1.9 | 1.58 | 1.55 | 1.40 |

Temperature rising current will cause the coil temperature approximate  $\Delta T 40^{\circ}\text{C}$   
 Saturation current will cause to drop approximately 30 %

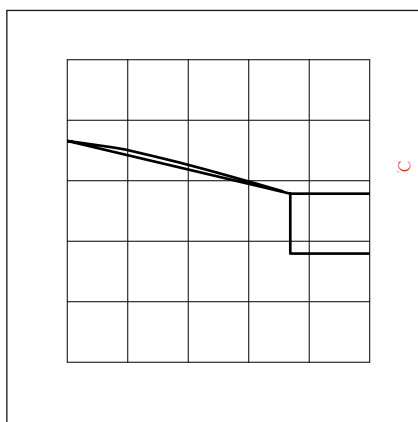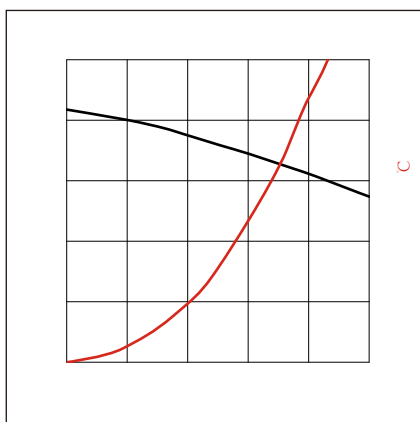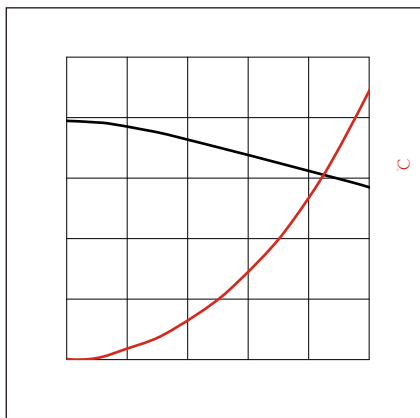

:

