
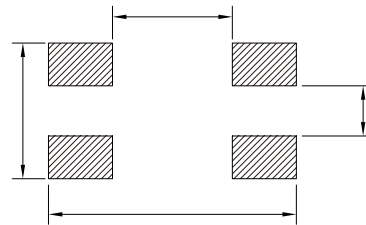







SCM Series

FEATURES

-
-
-
-



Part No	Impedance @ 100 MHz Min. ()	Impedance @ 100 MHz Typ. ()	DC Resistance Max. ()	Rated Current Max. (mA)	Rated Volt (V)	Withstand Volt (V)	IR Min. (M)
SCM4532-900-40	68	90	0.050	4000	50	125	10
SCM4532-231-35	173	230	0.050	3500	50	125	10
SCM4532-421-32	300	420	0.055	3200	50	125	10
SCM4532-601-25	450	600	0.060	2500	50	125	10
SCM4532-901-23	650	900	0.070	2300	50	125	10
SCM4532-142-20	1000	1400	0.100	2000	50	125	10
SCM4532-282-09	2100	2800	0.350	900	50	125	10

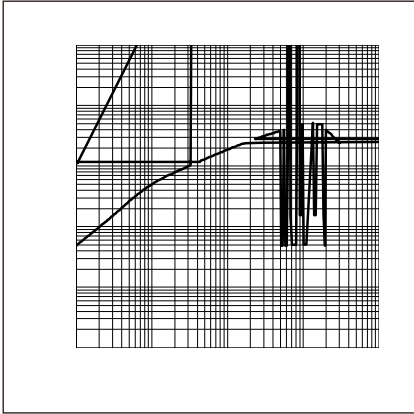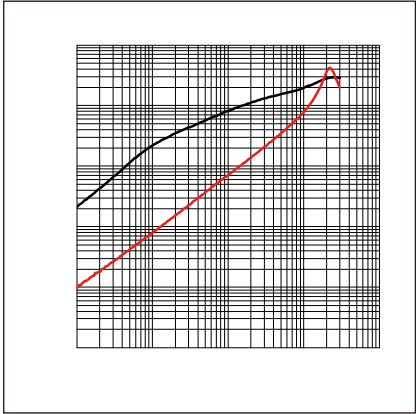

:

•

•

•

•

•

•

•

•

•

•

•

•

•